SEE REVERSE SIDE FOR IMPORTANT SAFETY INFORMATION

NOTE: For easier disassembly and assembly, ensure the fore-end strap is pulled taut while removing and installing the fore-end from the firearm.

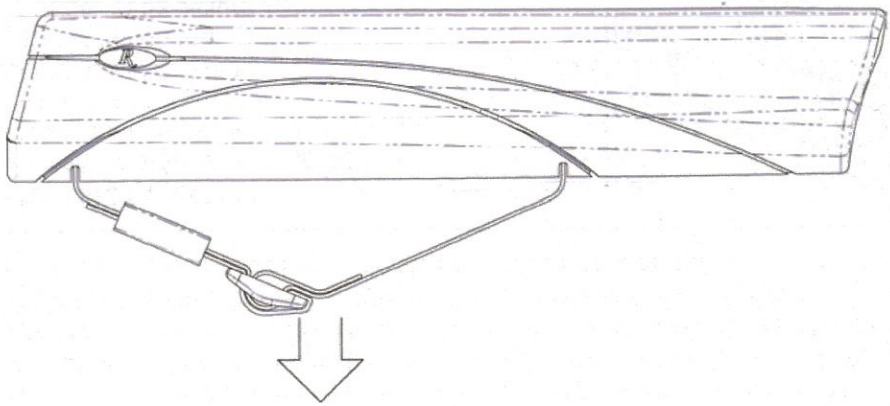

F418268

REV 10.18

WARNING: Under certain circumstances, improper installation of the fore-end strap may result in the strap coming free of the buckle, which may impair the user's ability to control the direction of the muzzle. It is always the gun handler's responsibility to safely control the direction of the muzzle. Loss of control of the muzzle direction may result in property damage, personal injury, or death. Always use the fore-end strap and follow the instructions below.

STRAP INSTALLATION

1. Install the strap end retainer on the strap. (See picture 1.)
2. Slide the end of the strap through the buckle. (See picture 2.)
3. Loop the end of the strap back through the buckle. (See picture 3.)
4. Route the strap end into the retainer and pull tight. (See picture 4.)

NOTE: Use of the retainer is optional.









See reverse side for additional assembly/disassembly guidance.